



TTM4-T

Thermocouples with Fixed Process Connection and Terminal Head

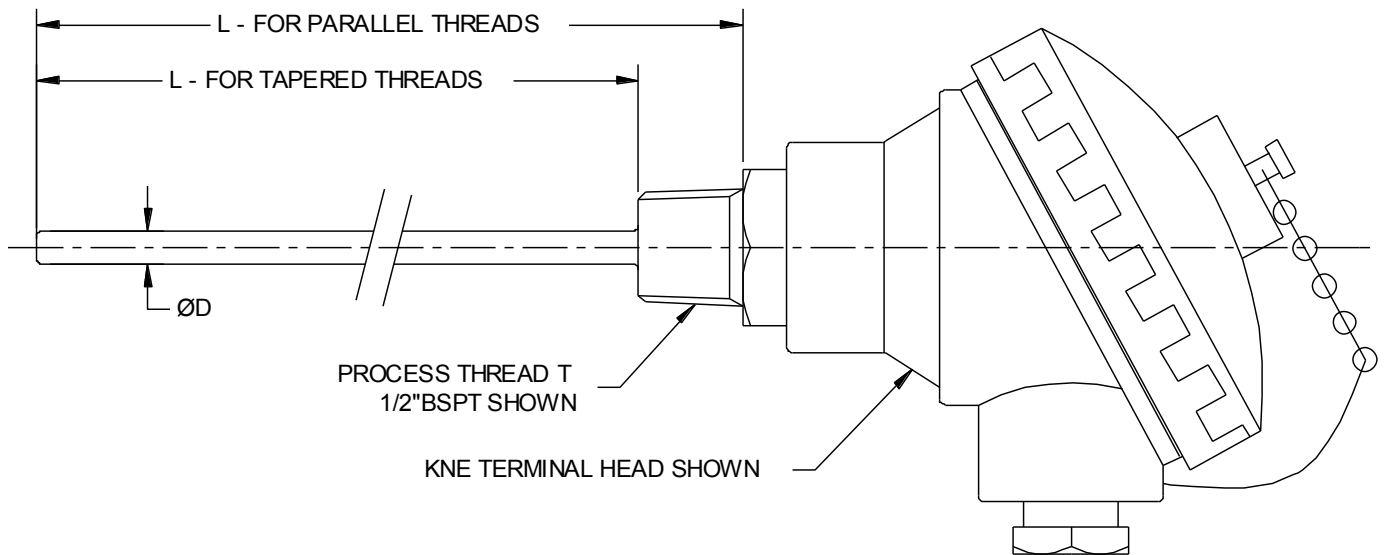

- Stem Probe with Process Connection and Terminal Head
- Welded Process Connection with Fixed Male Process Thread under Head
- Easy Installation Direct to Process
- Can also Connect to Pockets / Thermowells
- Ideal in Cramped Spaces or if Lagging Extension Impractical
- Choice of Head Fittings and Thread Sizes

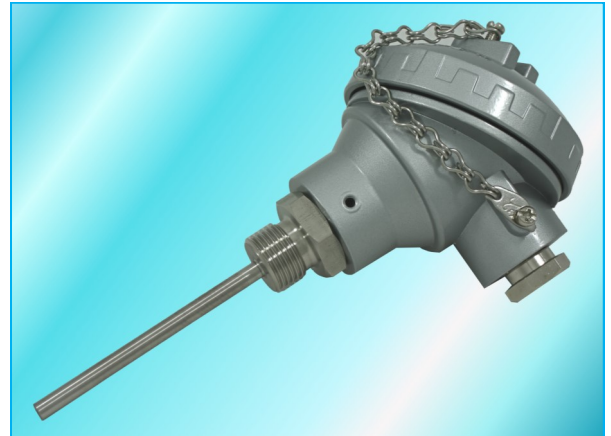


Specifications

Sensor Type	Type J, K or T thermocouple.
Operating Range	-50 to +250° C (Unless otherwise requested)
Sheath Material	316 stainless steel
Tolerance Band	BS EN 60584-2:1993 Class 1 or Class 2
Wiring System	Simplex or Duplex
Head Types	A - KNE Aluminium Alloy, IP68 B - KSE Aluminium Alloy, IP68 C - ABS, IP67 D - Glass Filled Nylon, IP65 E - 316 stainless steel, IP68 (Other heads available upon request)
Head Options	A - Ceramic Terminal Block B - In Head Transmitter—SEM203P (Specify Range) C - Tails for Customers Own Transmitter

TTM4-T

Thermocouple with Fixed Process Connection and Terminal Head

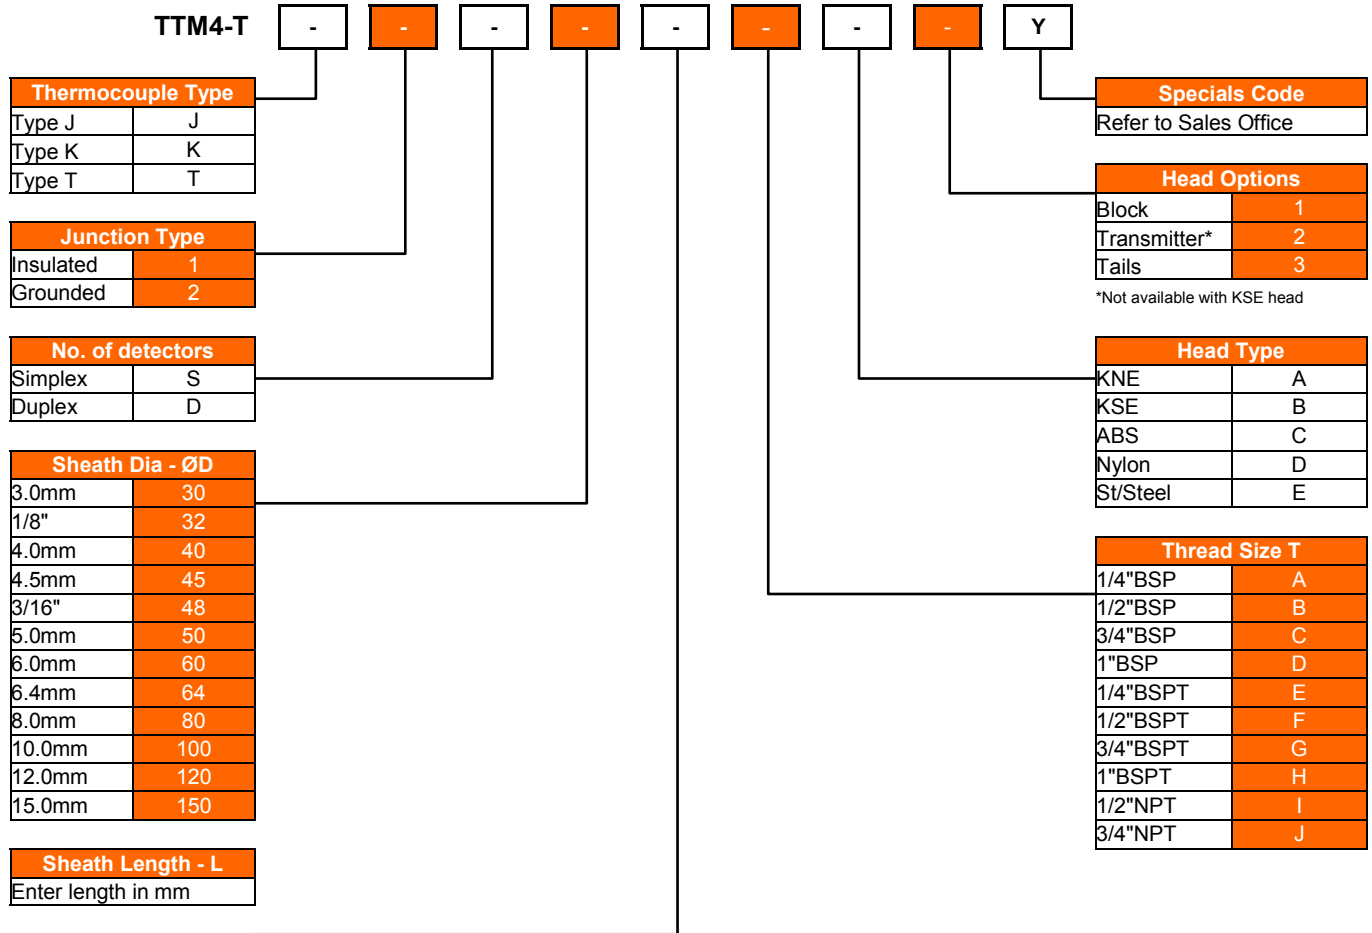

NOTE: Some option combinations may not be possible.

This data sheet gives details of the most popular options available for this type of sensor but is not intended to give an exhaustive list of possibilities. If you have a special requirement please do not hesitate to contact our sales office for assistance.

Accessories for your sensor...



Signal Conditioners



Pockets / Thermowells



Extension Cables