


# TWL-0-50-TW

## Fabricated Pocket with Compression Gland



- Simple, Cost Effective Fabricated Pocket
- Easy to Install
- No Need to Drain Down a system when Sensor is replaced
- Manufactured to Your Requirements
- For Use with our PPL1 and PPL3 Sensors

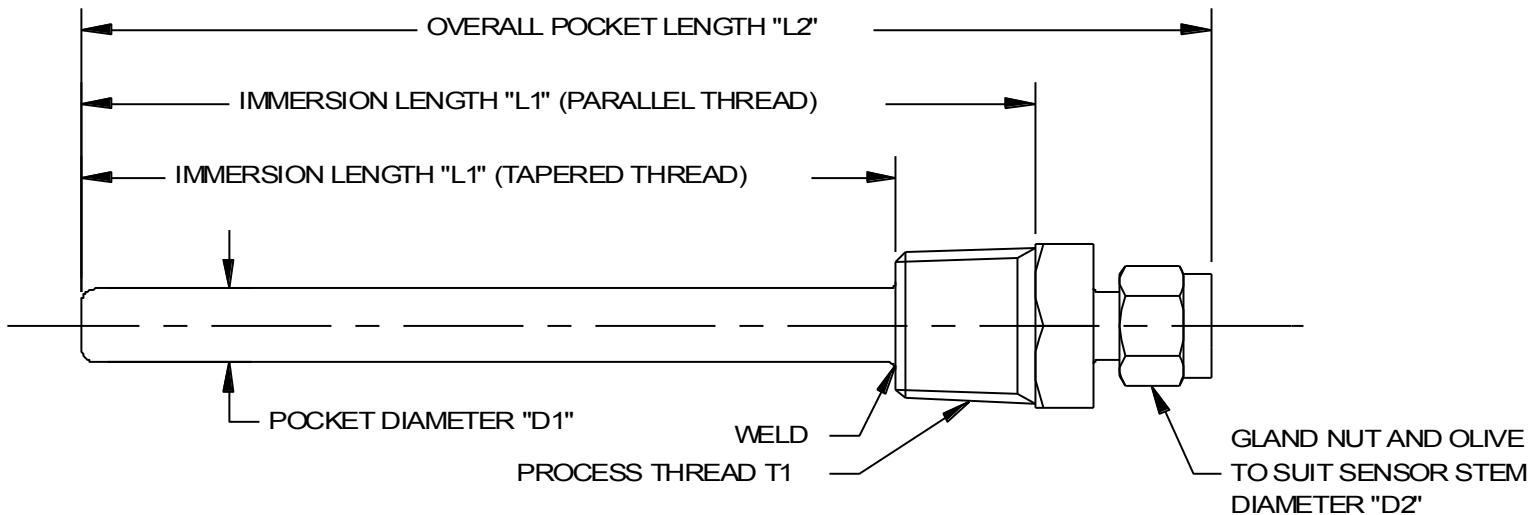

### Specifications

Pocket Material	316 stainless steel
Operating Range	-75 to +800°C
Thread Types	A - 1/4" BSP B - 1/2" BSP C - 3/4" BSP D - 1" BSP E - 1/4" BSPT F - 1/2" BSPT G - 3/4" BSPT H - 1" BSPT I - 1/2" NPT J - 3/4" NPT Other threads available upon request.

# TWL-0-50-TW

## Fabricated Pocket with Compression Gland



TWL-0-50-TW               

Sensor Dia - ØD2	
3.0mm*	30
1/8"	32
4.0mm	40
4.5mm	45
3/16"	48
5.0mm	50
6.0mm	60
6.4mm	64
8.0mm	80
10.0mm	100

Immersion - L1
Enter length in mm


Specials Code
Refer to Sales Office

Thread Size T	
1/4"BSP	A
1/2"BSP	B
3/4"BSP	C
1"BSP	D
1/4"BSPT	E
1/2"BSPT	F
3/4"BSPT	G
1"BSPT	H
1/2"NPT	I
3/4"NPT	J

NOTE: Some sheath diameter / lead type combinations require a pot seal. Some option combinations not possible.

This data sheet gives details of the most popular options available for this type of sensor but is not intended to give an exhaustive list of possibilities. If you have a special requirement please do not hesitate to contact our sales office for assistance.


Ideal for use with ...



TTE1 & TWE1 Probe



TTM3 & TWM3 Probe



TTM13 Probe



LTS20 Probe